
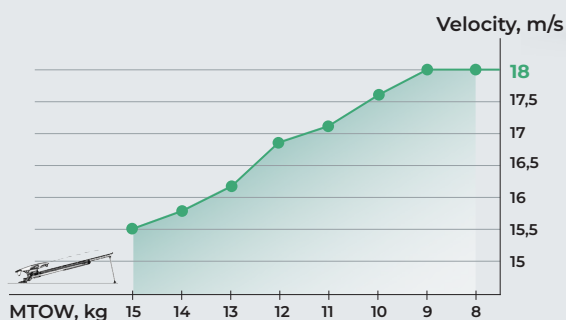


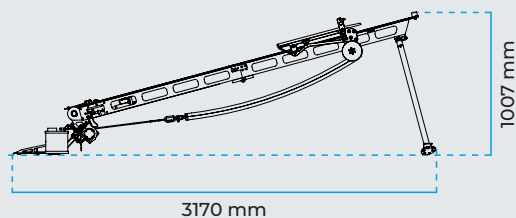

Battery capacity: 60 Ah  
Max launches per battery cycle: up to 10

## Tech Specifications:

| Parameter                               | Value         |
|-----------------------------------------|---------------|
| Max UAV weight supported for launch     | 15 kg         |
| Max UAV launch speed                    | 18 m/s        |
| Max towing force of elastic cords       | 420 kgf       |
| Operating temperature range             | -15 to +55 °C |
| Length of the launcher                  | 3.17 m        |
| Width of the launcher                   | 1.2 m         |
| Height of the launcher                  | 1.07 m        |
| Cart travel distance                    | 1.68 m        |
| Launcher rail angle relative to surface | 15°           |
| Total weight of launch system           | 70±3 kg       |
| Remote control cable length             | Up to 20 m    |
| Battery nominal voltage                 | 12 V          |
| Battery capacity                        | 60 Ah         |
| Max launches per full battery charge    | 10            |
| Setup time (2-person team)              | 15 min        |
| Minimum launch interval                 | 5 min         |
| Number of personnel required for setup  | 2             |

## What's Included:

| Item                                  | Quantity |
|---------------------------------------|----------|
| SCL-2 ground-based launch unit        | 1        |
| Ground control panel                  | 1        |
| Battery with charger and thermal case | 1        |
| Additional accessories kit            | 1        |
| Wind deflector                        | 1        |
| Pegs                                  | 6        |
| Spare parts kit                       | 1        |
| Operating documentation               | 1        |
| Transportation case                   | 1        |